



# RADIAL RIG NUMBER & LETTER SIZES AND POSITIONING

January 2009 Edition



## UPRIGHT NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm


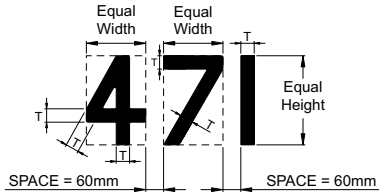


## ANGLED NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm

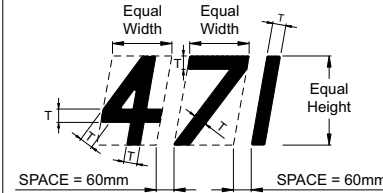

27

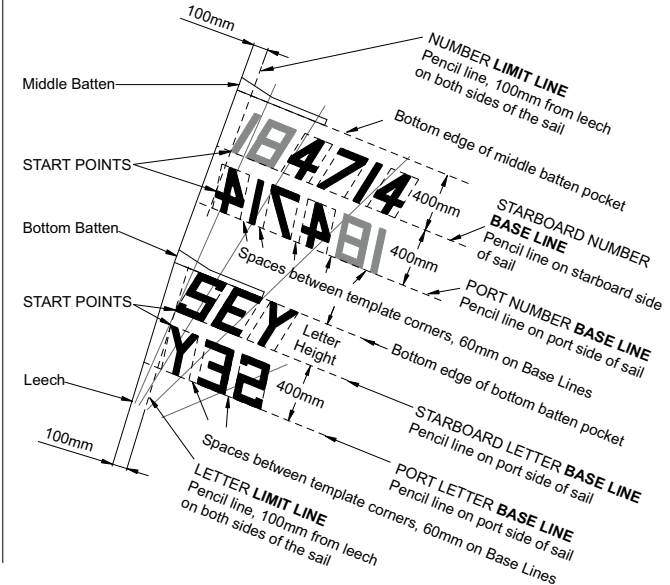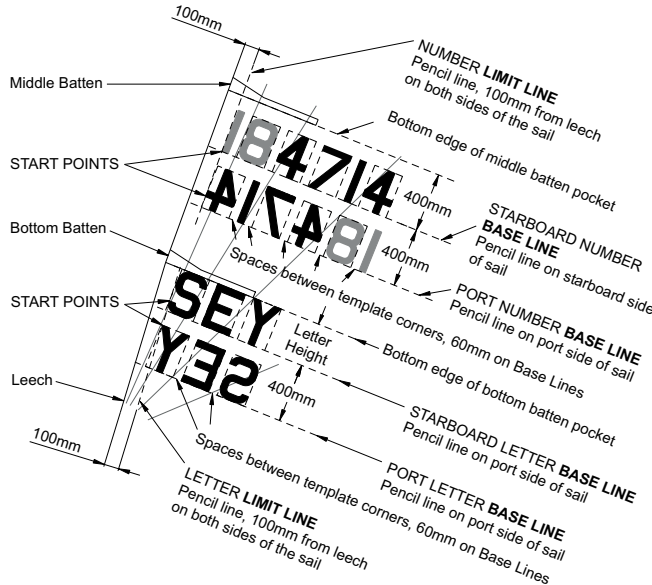

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.
2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR. PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.