
© ILCA


STANDARD MKI RIG NUMBER & LETTER SIZES AND POSITIONING

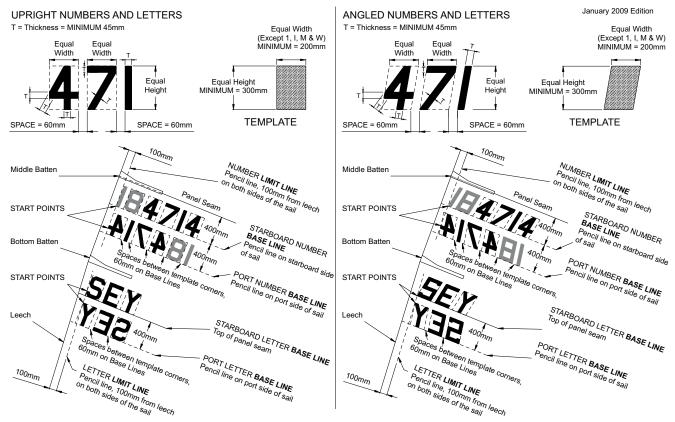

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL. 2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR,


25

STANDARD MKII RIG NUMBER & LETTER SIZES AND POSITIONING

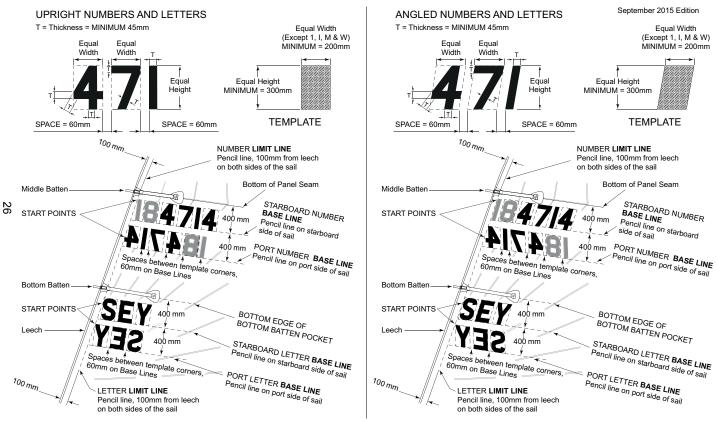

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL. 2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.

RADIAL RIG NUMBER & LETTER SIZES AND POSITIONING

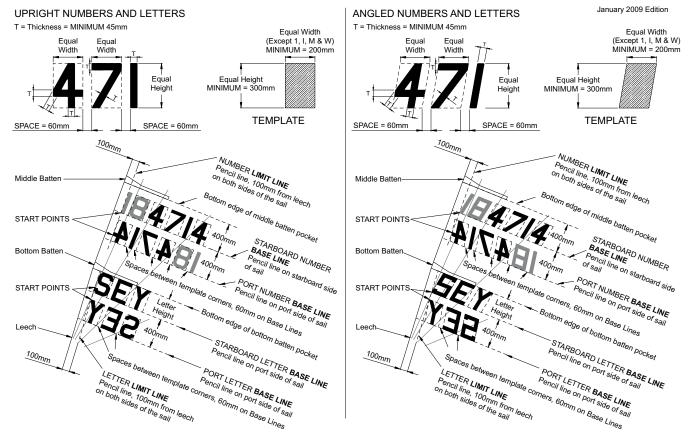

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL. 2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR. © ILCA

LASER 4.7 RIG NUMBER & LETTER SIZES AND POSITIONING

November 2013 Edition UPRIGHT NUMBERS AND LETTERS ANGLED NUMBERS AND LETTERS T = Thickness = MINIMUM 30mm T = Thickness = MINIMUM 30mm Equal Width Equal Width (Except 1, I, M & W) (Except 1, I, M & W) Equal Equal Equal Equal MINIMUM = 150mm Width Width MINIMUM = 150mm Width Width Equal Height Equal Height Equal Equal MINIMUM = 220mm MINIMUM = 220mm Height Height MAXIMUM = 240mmMAXIMUM = 240mm TEMPI ATE TEMPI ATE SPACE = 40mm SPACE = 40mm SPACE = 40mm SPACE = 40mm100mm 100mm - NUMBER AND LETTER LIMIT LINE NUMBER AND LETTER LIMIT LINE - NUMBER ANV LE I LER LINN - Pencil line, 100mm from lech Pencil line, 100mm from leech n both sides of the sail n both sides of the sail Middle Batter Middle Batten ^{Bottom} edge of middle batten pocket Sottom edge of middle batten pocket Leech Leech START POINTS START POINTS 1 270mm 12romm STARBOARD NUMBER STARBOARD NUMBER BASE LINE BASE LINE Panel seam Panel seam 270'mm 270_{mm} Bottom Batten Bottom Batten PORT NUMBER BASE LINE PORT NUMBER BASE LINE Pencil line on port side of sail Pencil line on port side of sail 270'mm 270mm STARBOARD LETTER BASE LINE STARBOARD LETTER BASE LINE 27_{0mm} 27.0_{0mm} Pencil line on starboard side of sail SIAKBUAKU LEIIEK BASE Pencil line on port side of sail Spaces between template comers, 40mm on Base Lines Spaces between template corners, 40mm on Base Lines PORT LETTER BASE LINE PORT LETTER BASE LINE Pencil line on port side of sail Pencil line on port side of sail

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 30mm, SO USE 40mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL. 2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.

28