
52

## UPRIGHT NUMBERS AND LETTERS T = Thickness = MINIMUM 30mm Equal Width (Except 1, I, M & W) Egual Width MINIMUM = 150mm Equal Height Equal MINIMUM = 220mm Height MAXIMUM = 240mm TEMPI ATE Suggested Space = 40mm Suggested Space = 40mm Minimum Space = 30mm Minimum Space = 30mm 100mm\* NUMBER AND LETTER LIMIT LINE Pencil line, 100mm\* from leech on both sides of the sail Middle Batten Measure from bottom edge Leech of middle batten pocket START POINTS STARBOARD NUMBER BASE LINE Panel seam PORT NUMBER BASE LINE Pencil line on port side of sail STARBOARD LETTER BASE LINE SIAKOUAKU LEIIEK DAOE LINE Pancil line on starboard side of sail Spaces between template corners, 40nnn on Base Lines PORTLETTER BASE LINE Pencil line on port side of sail

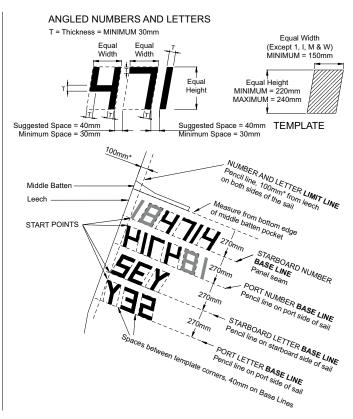

- 1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 30mm, SO USE 40mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.
  2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK, PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR,
- PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.
- \* CLOSEST POINT OF LETTER OR NUMBER SHOULD BE 100mm FROM LEECH, WITH TOLERANCE +/- 12 mm