


4.7 SAIL NUMBER & LETTER SIZES AND POSITIONING

UPRIGHT NUMBERS AND LETTERS

T = Thickness = MINIMUM 30mm

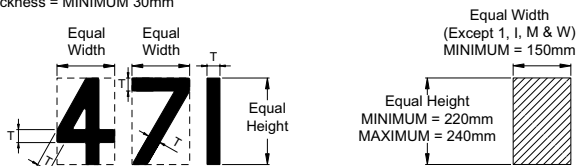


Suggested Space = 40mm
Minimum Space = 30mm

TEMPLATE

ANGLED NUMBERS AND LETTERS



T = Thickness = MINIMUM 30mm

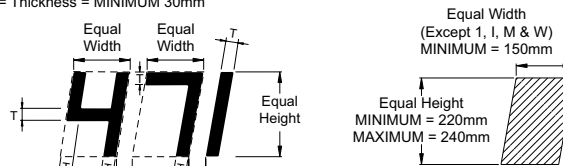

Suggested Space = 40mm
Minimum Space = 30mm

TEMPLATE

52

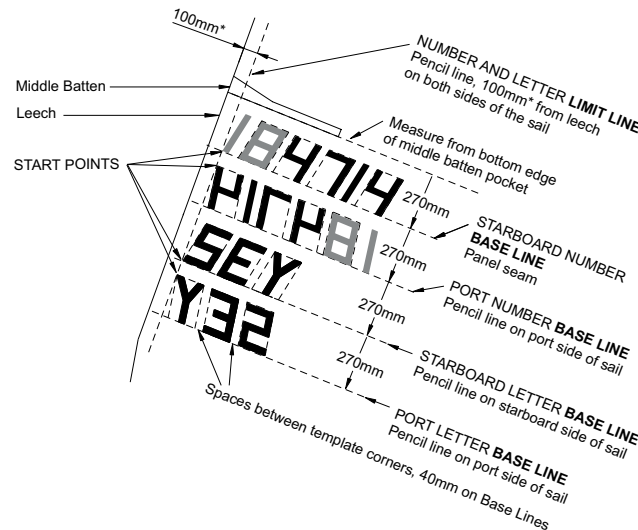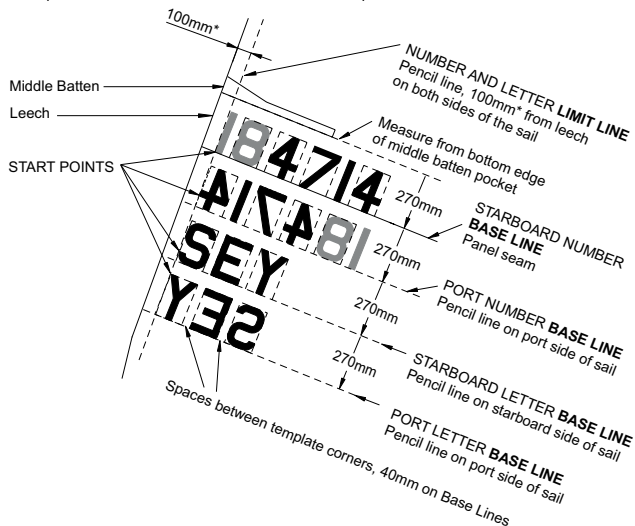

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 30mm, SO USE 40mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.
2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.


* CLOSEST POINT OF LETTER OR NUMBER SHOULD BE 100mm FROM LEECH, WITH TOLERANCE +/- 12 mm.

PLEASE NOTE DIAGRAMS ARE NOT PART OF THE CLASS RULES

RADIAL SAIL NUMBER & LETTER SIZES AND POSITIONING

UPRIGHT NUMBERS AND LETTERS


T = Thickness = MINIMUM 45mm

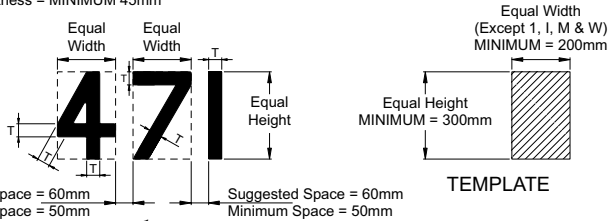



Suggested Space = 60mm
Minimum Space = 50mm

ANGLED NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm

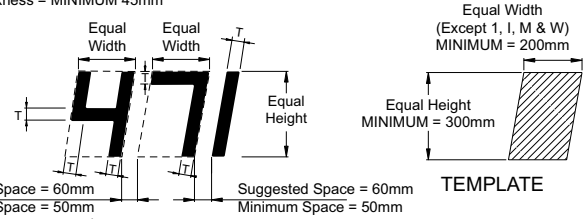

Suggested Space = 60mm
Minimum Space = 50mm

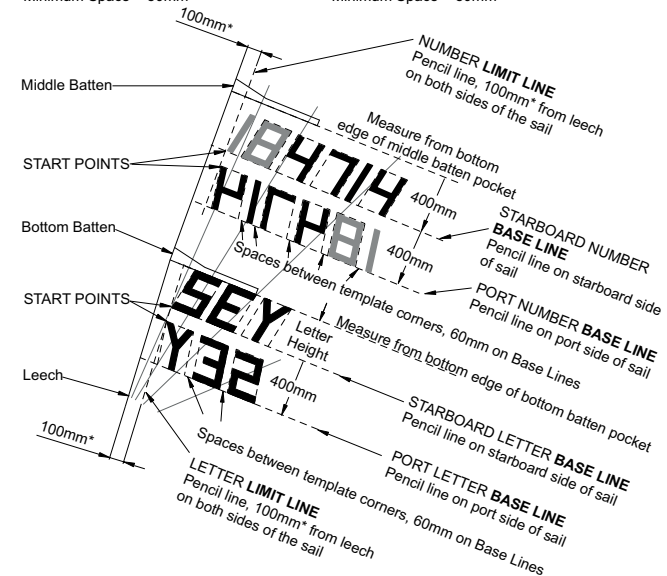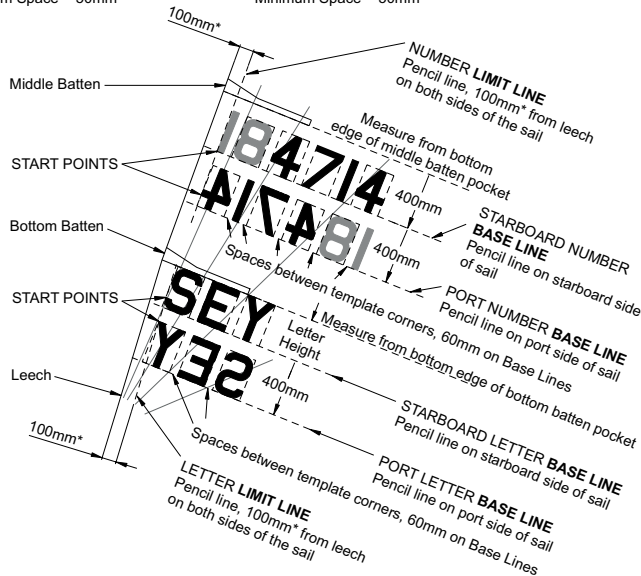

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.
2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.

* CLOSEST POINT OF LETTER OR NUMBER SHOULD BE 100mm FROM LEECH, WITH TOLERANCE +/- 12 mm.


PLEASE NOTE DIAGRAMS ARE NOT PART OF THE CLASS RULES

STANDARD MKII (BI-RADIAL CUT) SAIL NUMBER & LETTER SIZES AND POSITIONING



UPRIGHT NUMBERS AND LETTERS


T = Thickness = MINIMUM 45mm

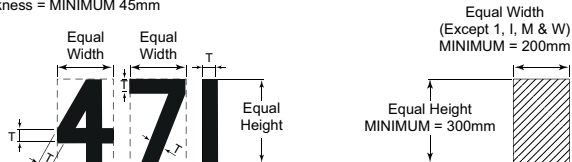

Suggested Space = 60mm
Minimum Space = 50mm



ANGLED NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm

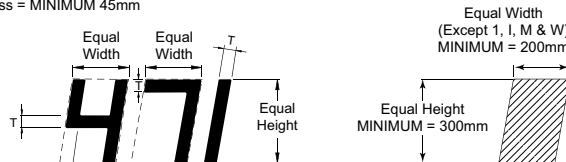

Suggested Space = 60mm
Minimum Space = 50mm

54

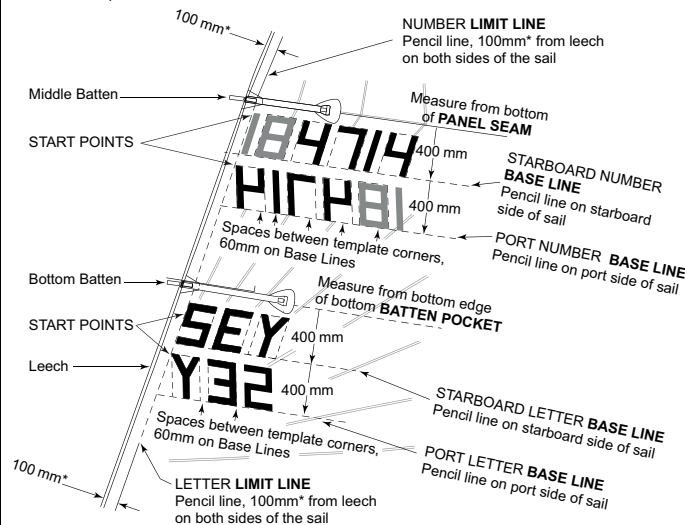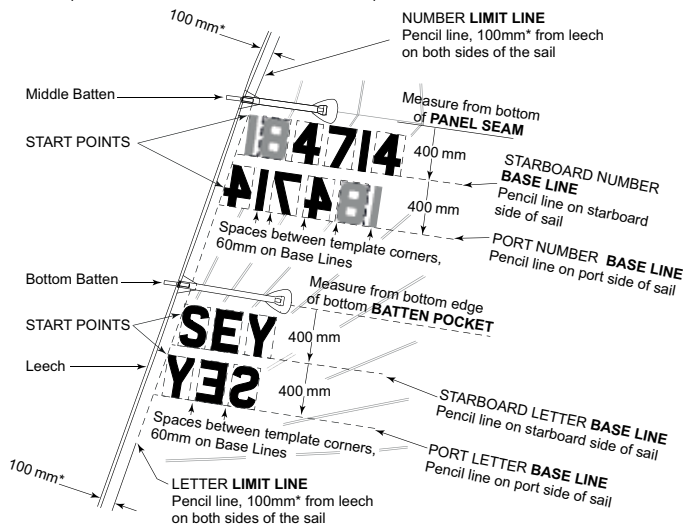

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.
2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.

* CLOSEST POINT OF LETTER OR NUMBER SHOULD BE 100mm FROM LEECH, WITH TOLERANCE +/- 12 mm.


PLEASE NOTE DIAGRAMS ARE NOT PART OF THE CLASS RULES

STANDARD MKI (CROSS-CUT) NUMBER & LETTER SIZES AND POSITIONING



UPRIGHT NUMBERS AND LETTERS


T = Thickness = MINIMUM 45mm

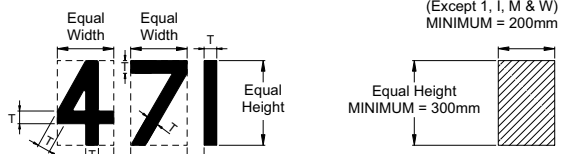

Suggested Space = 60mm
Minimum Space = 50mm



ANGLED NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm

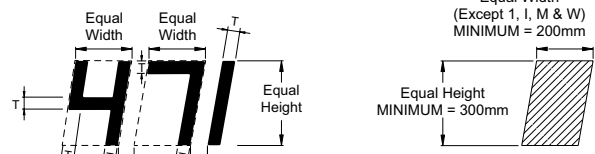

Suggested Space = 60mm
Minimum Space = 50mm

55

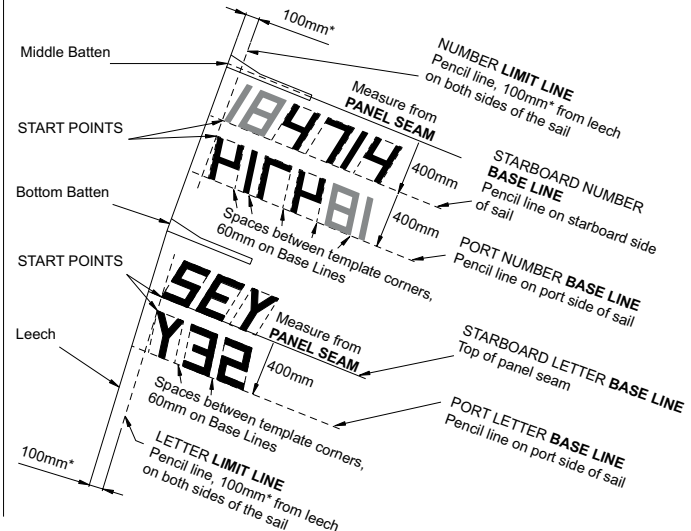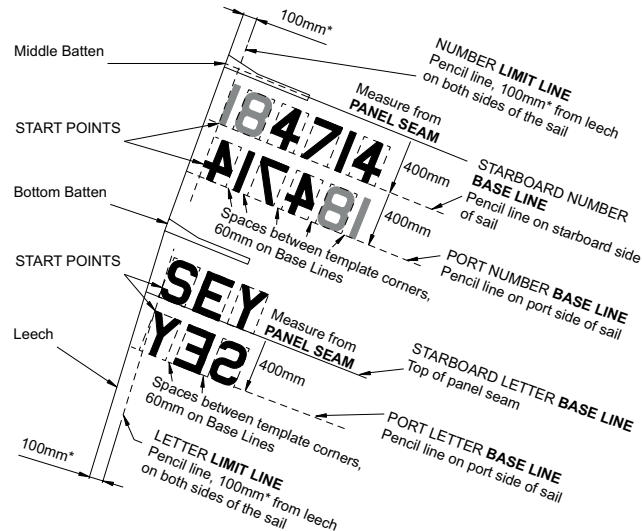

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.
2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.

* CLOSEST POINT OF LETTER OR NUMBER SHOULD BE 100mm FROM LEECH, WITH TOLERANCE +/- 12 mm.

PLEASE NOTE DIAGRAMS ARE NOT PART OF THE CLASS RULES