


# LASER 4.7 SAIL NUMBER & LETTER SIZES AND POSITIONING

## UPRIGHT NUMBERS AND LETTERS


T = Thickness = MINIMUM 30mm

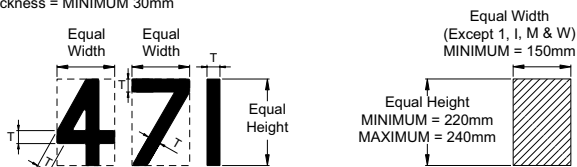

Suggested Space = 40mm  
Minimum Space = 30mm



## ANGLED NUMBERS AND LETTERS

T = Thickness = MINIMUM 30mm

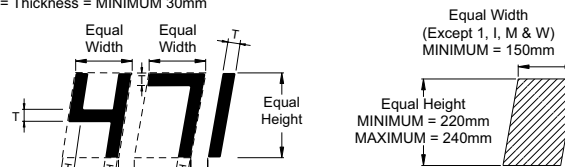

Suggested Space = 40mm  
Minimum Space = 30mm

52

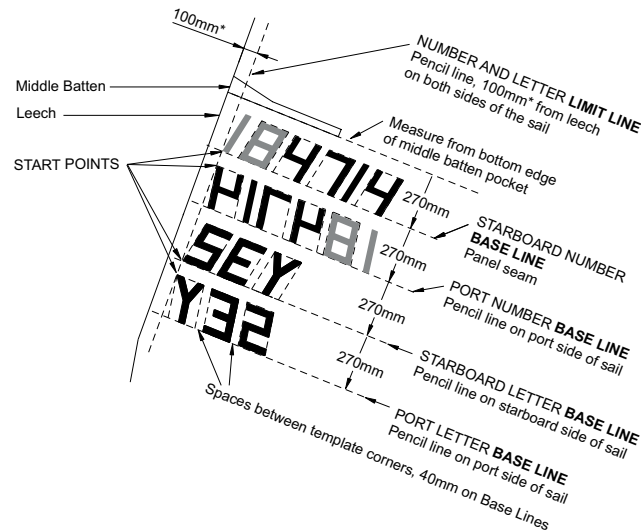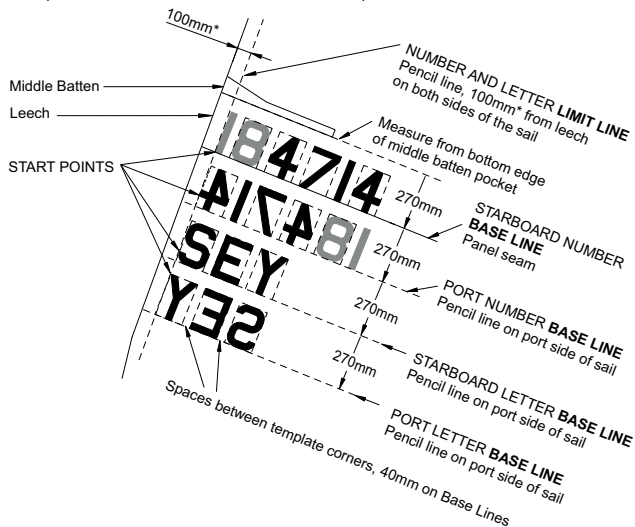

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 30mm, SO USE 40mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.
2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.

\* CLOSEST POINT OF LETTER OR NUMBER SHOULD BE 100mm FROM LEECH, WITH TOLERANCE +/- 12 mm.

**PLEASE NOTE DIAGRAMS ARE NOT PART OF THE CLASS RULES**